


Specifications

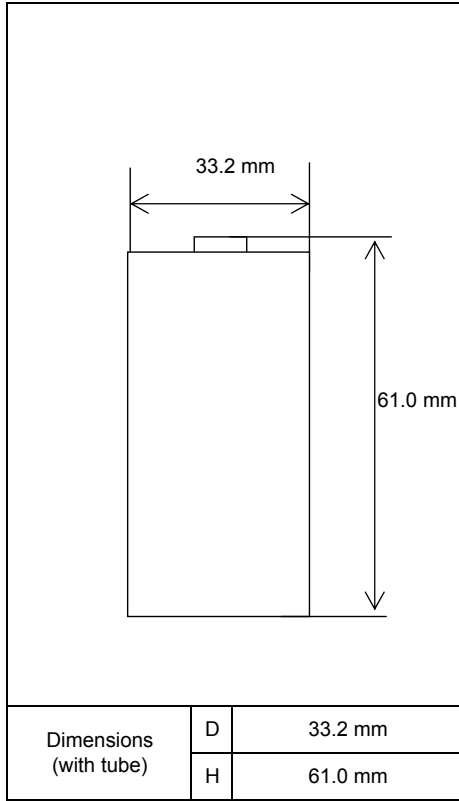


Type : Nickel-Metal Hydride Battery		Size : D	
Capacity <sup>1)</sup>	Typical	6,000mAh	
	Minimum	5,700mAh	
Nominal Voltage		1.2V	
Charging Current x Time	Fast Charge <sup>2)</sup>	3000mA x Approx.2.4h	
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup> 0°C - 40°C	
	Discharge Condition 0°C - 50°C		
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		Approx. 40mΩ(at 1000Hz)	
Weight <sup>4)</sup>		Approx. 100g	
Size <sup>4)</sup> : (Diameter) x (Height)		33.2(D) x 61(H) mm	

- 1) Single cell capacity under the following condition.
- 1) Charge : 600mA×16h, Discharge : 1200mA(E.V.=1.0V) at 20°C
- 2) Use recommended charging system.
- 3) After a few charge and discharge cycles under the above 1) condition.
- 4) With tube.

Typical Characteristics

Charge

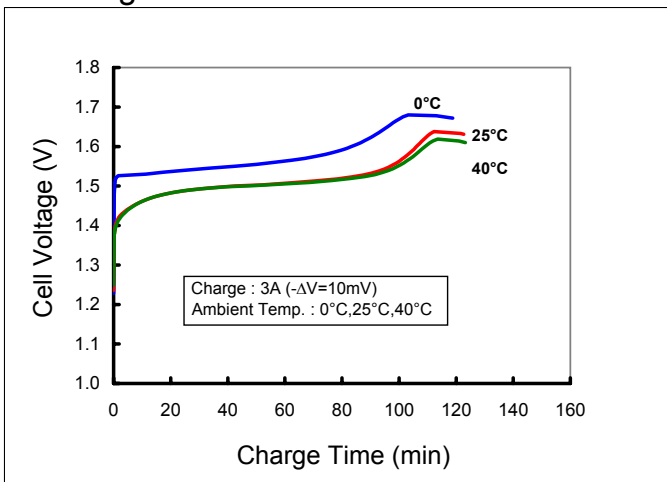

Discharge

